

BOXED-IN SOFFIT

MC-17D

VALLEY
(OPTIONAL V-CUT DEPICTED AT
END OF VALLEY METAL)

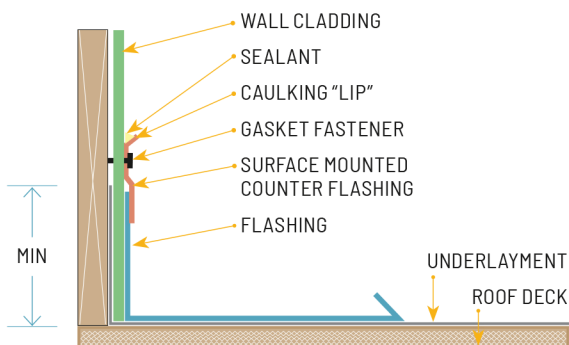
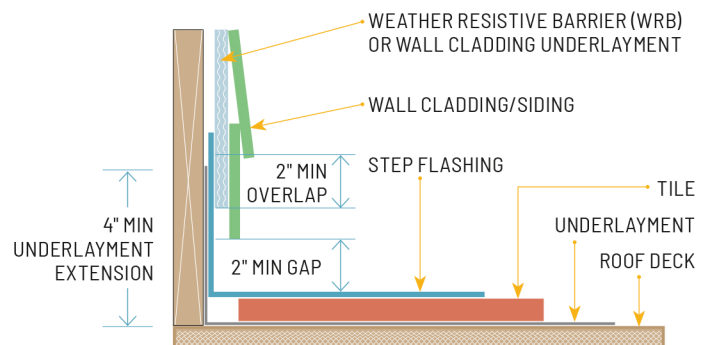
FASCIA BOARD

OPTIONAL COUNTER FLASHING
(EXTEND OVER STEP FLASHING)

STEP FLASHING

EXTERIOR WALL CLADDING
(OVER WEATHER RESISTIVE
BARRIER (WRB) BY OTHERS)

HEAD WALL OR APRON FLASHING

**SURFACE MOUNT FLASHING****STEP FLASHING****NOTES:**

1. Surface-mounted flashing may be sufficient in some mild climates. However concealed or insert flashing such as "Z" metal or stucco-type two piece reglet and counter flashing or step flashing, are recommended in wet climates, particularly with stucco or other permeable cladding systems.
2. Dimensions shown are minimums and are intended to be approximate to all for reasonable tolerances due to field conditions.

Drawing shown depicts the application of all tile profiles. Unless otherwise noted, it would apply to either concrete or clay tiles.